


# Enclosure series aluNORM

Type: AS 166

Material-No.: 100.166.000

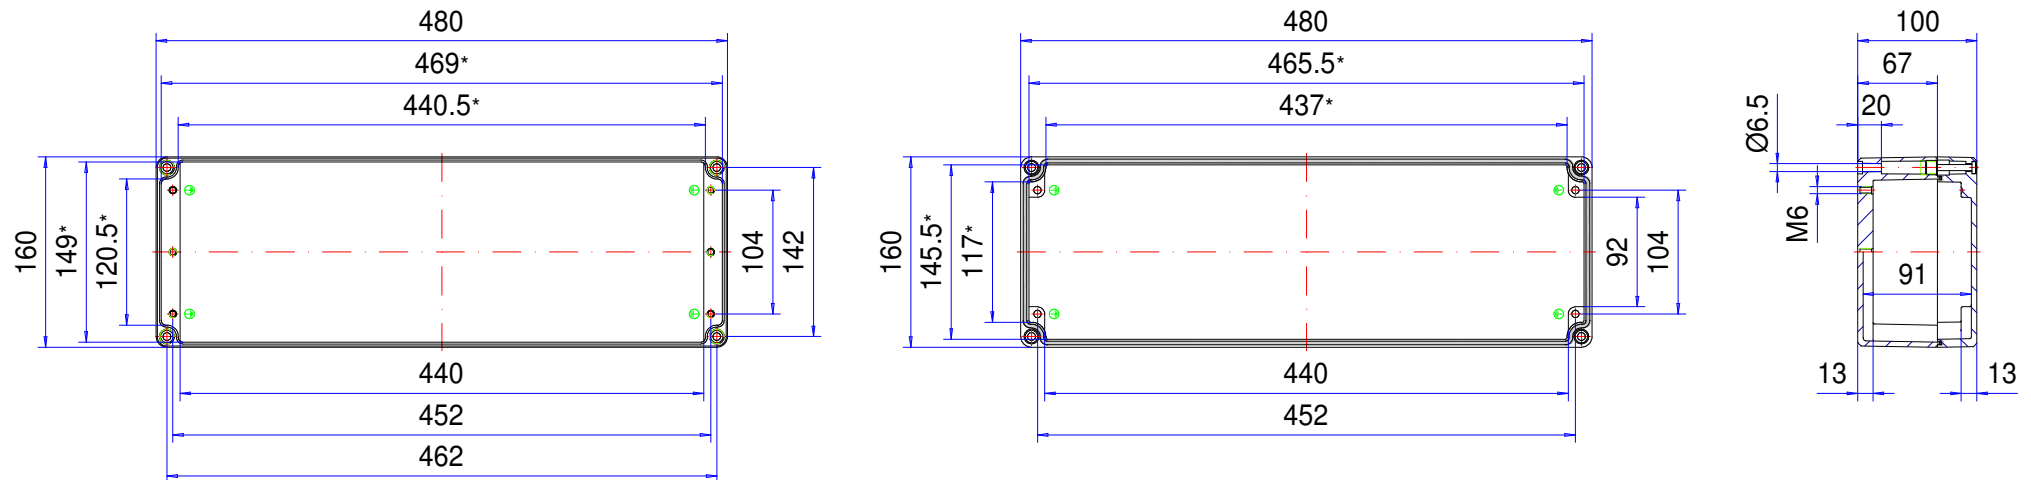

\* Please note: Mould slope for casting ejection, dimensions in the amount of the bottom!

|                    |                                          |                                                                                      |                 |                                                 |
|--------------------|------------------------------------------|--------------------------------------------------------------------------------------|-----------------|-------------------------------------------------|
| Enclosure material | GK-Al Si 12 (DIN 1725)                   |  | Weight          | 3.900 g                                         |
| Lid screws         | 4x stainless steel 1.4567 (V2A), captive |                                                                                      | Earthing screws | 4x M6x9, copper-plated                          |
| Gasket             | 1x Chloroprene (CR), light grey          |                                                                                      | Coating         | Powder coating RAL 7032, pebble grey            |
| Ingress protection | IP66 EN 60529                            |                                                                                      | Tolerance       | GTA 14/5 DIN 1688-3 (outside dimensions ±0,8mm) |
|                    |                                          |                                                                                      |                 |                                                 |