


Centrifugal fans for AC operation

Overview of air performance

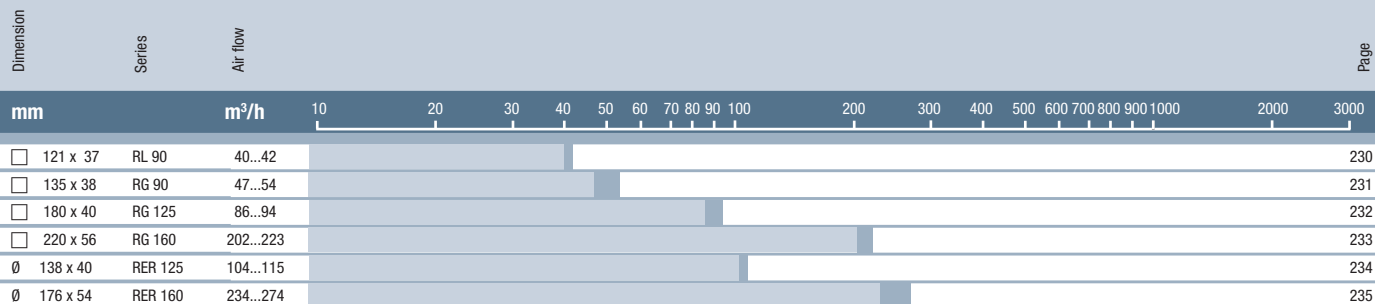

Subject to alternations

Overview of technically feasible designs

Dimension	VDE, UL, CSA	Sleeve bearings/ ball bearings	Speed signal	Humidity protection IP >= IP 54	IP >= IP 68	Salt fog protection	Page
Centrifugal fans							
Series	mm	OPTIONAL				p.	
RL 90	121 x 121 x 37	ja □ / ■	–	● ● – ●	230		
RG 90	135 x 135 x 38	ja □ / ■	–	● ● – ●	231		
RG 125	180 x 180 x 40	ja ■	–	● ● – ●	232		
RG 160	220 x 220 x 56	ja ■	–	● ● – ●	233		
RER 125	138 Ø x 40	ja ■	–	● ● – ●	234		
RER 160	176 Ø x 54	ja ■	–	● ● – ●	235		
Subject to alternations							
● available – not yet available □ Sleeve bearings ■ Ball bearings							